

LSW single needle series (edge trimming)

High speed, Large vertical axis hook, Compound feed and walking foot, Reverse stitch, Lockstitch machines



LSW-8BLVMF

Variety

LSW-8BLVMF

Vertical edge trimming (front), synchronized binder(*)


LSW-8BLM

Vertical edge trimming(right)

(*)Available various special binder at extra charge



LSW-8BLVMF

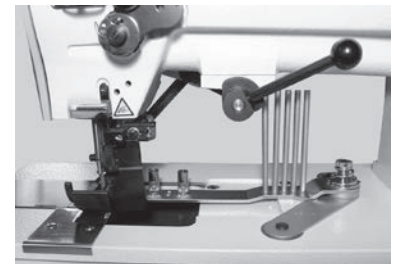


Applications


- For sewing medium to heavy weight fabrics, leather, vinyl, synthetics and laminated and coated materials
- Designed for operation such as tape binding, edge trimming for quilt, cushion, cover and automobile-interior.

* 8BLVMF Bedding, cover, carpet.

* 8BLM Heavy weight materials, automobile-interior and exterior decorations with trimming works.



LSW-8BLVMF



LSW-8BLM


LSW single needle series (edge trimming)

Features

- Seaming, tape binding and trimming can be performed by one operation.
- Large vertical axis hook. (Automatic hook lubrication)
- Safety clutch prevents the hook from being damaged.

•LSW-8BLVMF

Special binder can be supplied upon your request.



•LSW-8BLM


Sewing and Trimming can be performed by one operation



Suit for sewing and trimming simultaneous for leather, vinyl, heavy materials, automobile-interior, exterior decorations.

•LSW-8BLVMF

Trimming(front) and Taping can be performed by one operation.

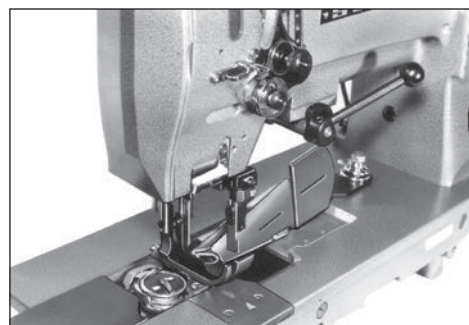

Suit for trimming and taping simultaneous for bedding, cover, cushion and carpet, etc. Trimming can be made in front of needle.

Specifications (LSW-□)

| Variety | 8BLVMF | 8BLM |
|--|--|--|
| Number of needle | Single needle | |
| Max. sewing speed | 2,500 s.p.m. | |
| Max. stitch length | 1/4" (6.2 mm) | |
| Clearance under presser foot | by knee | 15/32" (12 mm) |
| | by hand | 21/64" (8.5 mm) |
| Needle bar stroke | 1-5/16" (33.2 mm) | |
| Needle(standard) | MTx190 (#19) , 190R (#120) | DPx17 (#22) , 135x17 (#140) |
| Thread | #30 (standard) | #8 (standard) |
| Hook | Large vertical axis hook (2.0 times) | |
| Amount of lift of walking foot | 1/8"-15/64" standard 5/32" (3 - 6 mm) (standard 4 mm) | |
| Standard binder spec (extra charge) | 4-Fold Tape width 2-3/8"(60 mm) | - |
| Distance between seam and cutting edge | 6 - 18 mm (standard 14 mm) 15/64"- 45/64" (standard 35/64") | 4 , 5 , 6.5 , 8 , 10 mm (standard 8 mm) 5/16" - 25/64" (standard 5/16") |
| Thread take up lever | Slide type | |
| Lubrication | Semi-automatic lubrication type | |
| Bed size | 20-25/64"x 7" (518 x 177 mm) | |
| Working space | 10-5/32"x 3-35/64" (258 x 90 mm) | |
| Motor | Clutch motor | |
| Net weight(Head only) | 34Kg | |

NOTE: (1) Speed depends on threads, materials and type of operation (2) Specifications subject to change without notice



SEIKO SEWING MACHINE CO., LTD.

2-13-6, Sakaecho, Funabashi-shi
Chiba Prefecture, 273-0018, Japan

Phone : +81-47-420-3561 (Overseas dept.)

Fax : +81-47-420-3560

E-mail : export@seiko-sewing.co.jp

Printed in Japan 2016.04

<http://www.seiko-sewing.co.jp/>