


PW series

High speed, Post bed, Vertical axis hook, Drop feed, Reverse stitch, Lockstitch machines

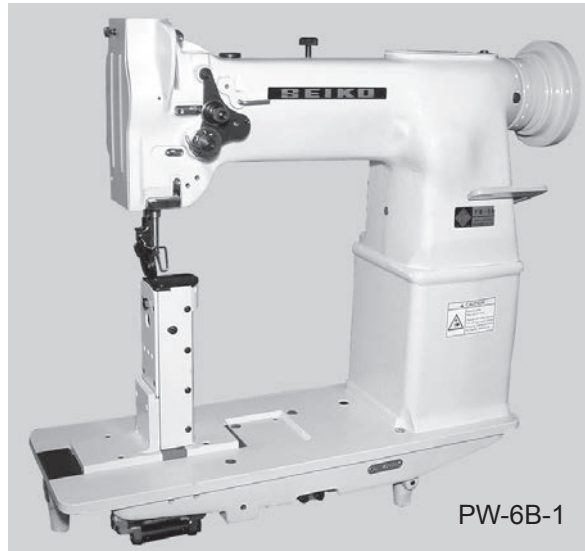

PW-6B-1

Variety



PW-6B-1
Single needle



PW-26B-1
Two needle



PW-26B-1

Applications

- For sewing medium to heavy weight fabrics, leather, vinyl, synthetics and laminated and coated materials.
- Suitable for sewing such as raincoats, underwear, overalls, foundation garments, corsets and shoes.




PW series

Features (PW-□)

- Post bed and wide working space makes it easy for sewing of large materials.
- Roller presser foot allows for turning of sharp corners and tight curves.

* Roller presser foot is to be fitted with 3/64"-3/32" gauge size machine as standard (26B-1)

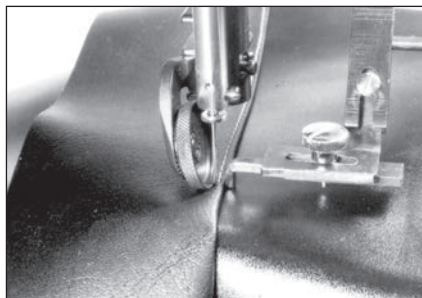

PW-6B-1

Specifications (PW-□)

Variety	6B-1	26B-1
Number of needle	Single needle	Two needle
Max. sewing speed	2,800 s.p.m.	2,500 s.p.m.
Max. stitch length	11/64" (4.5 mm)	
Clearance under presser foot	by knee	5/16" (8 mm)
	by hand	15/64" (6 mm)
Needle bar stroke	1-5/16" (33.2 mm)	
Needle(standard)	DPxF22 (#14) , 134KKS (#90)	
Thread	#30 (standard)	
Hook	Vertical axis hook	
Thread take up lever	Slide type	
Lubrication	Hand type	
Bed size	20-25/64" x 7" (518 x 177 mm)	
Post height	7" (178 mm)	
Working space	10-5/32" x 11-11/32" (258 x 288 mm)	
Motor	Clutch motor	
Net weight(Head only)	39Kg	40Kg

NOTE: (1) Speed depends on threads, materials and type of operation
 (2) Specifications subject to change without notice

Needle gauge list

Variety	Needle gauge size
PW-26B-1	standard : 1/16"(1.6 mm), 3/32"(2.4 mm) special : 3/64"(1.2 mm), 5/64"(28 mm)



SEIKO SEWING MACHINE CO., LTD.

2-13-6, Sakaecho, Funabashi-shi
 Chiba Prefecture, 273-0018, Japan

Phone : +81-47-420-3561 (Overseas dept.)

Fax : +81-47-420-3560

E-mail : export@seiko-sewing.co.jp

Printed in Japan 2016.04

<http://www.seiko-sewing.co.jp/>