

# SKZ series

Single needle, Extra heavy duty, Extra large horizontal axis hook, Reverse stitch, Zig-zag stitch(lockstitch)machines



SKZ-6B

## Variety

### 2-point(1-step) zig-zag


- |   |   |  |
|---|---|--|
|  |  | <b>SKZ-2B</b><br>Upper and lower feed      |
|  |  | <b>SKZ-6B</b><br>Lower feed                |
|  |  | <b>SKZ-6BR</b><br>Lower feed, cloth puller |

### 3-point(2-step) zig-zag

- |   |   |  |
|---|---|--|
|  |  | <b>SKZ-2B-3</b><br>Upper and lower feed      |
|  |  | <b>SKZ-6B-3</b><br>Lower feed                |
|  |  | <b>SKZ-6BR-3</b><br>Lower feed, cloth puller |


## Applications

- For sewing medium to extra heavy weight materials such as fabrics, leather, canvas, and vinyl.
- Suitable for sewing such as luggage, rope, blankets, nets(fishing net), carpets.

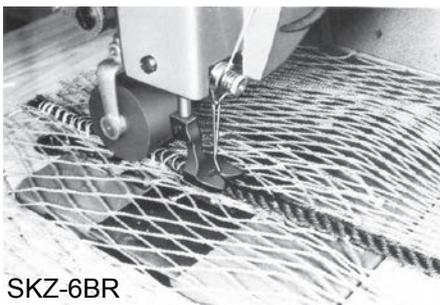

SKZ-6BR

\*Suit for repairing fishing net  
Puller performs exact stitching, by fixing flexible materials, thus suitable for sewing and repairing vinyl made fishing net, etc.

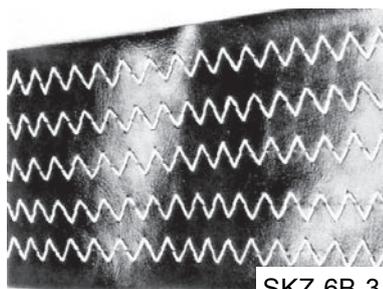

SKZ-6B-3

\*Suit for sewing elastic and stretching materials  
Three steps zig zag stitching suitable for sewing elastic and stretching materials on foundation. (Sewing type 308)



## Features (SKZ-□)

- Suitable for ultra heavy materials
- Puller performs accurate feed for ultra heavy materials (6BR, 6BR-3)
- Large horizontal axis rotary hook
- Extra wide zig-zag
- Cording foot available
- From wider zig-zag stitch to straight stitch

\*Various zig zag stitch can easily be made, from 12.7mm to 0mm straight stitch, suit to wide application.



SKZ-6B



SKZ-6B

## Specifications (SKZ-□)

Variety	2B	2B-3	6B	6BR	6B-3	6BR-3
Number of needle	Single needle					
Max. sewing speed	1,000 s.p.m.					
Max. stitch length	19/64" (7.5 mm)	5/32" (4 mm)	19/64" (7.5 mm)			
Zig-Zag width	0 -1/2" (0 -12.7 mm)					
Clearance under presser foot	by knee		19/32" (15 mm)			
	by hand		25/64" (10 mm)			
Needle bar stroke	2" (50.8 mm)					
Needle (standard)	DD x H14 (#25)					
Thread	#5 (standard)					
Hook	Extra large horizontal axis hook					
Thread take up lever	Link type					
Lubrication	Hand type					
Amount of lift of walking foot	1/8"-15/64" (Standard 7/32") (3 - 6 mm) (Standard 5.5 mm)		—			
Bed size	20-33/64"x 9-27/32" (521 x 250 mm)					
Working space	10"x 7- 43/64" (254 x 195 mm)					
Net weight (Head only)	55 Kg			54 Kg		
Motor	Clutch motor					

NOTE: (1) Speed depends on threads, materials and type of operation  
(2) Specifications subject to change without notice



**SEIKO SEWING MACHINE CO., LTD.**

2-13-6, Sakaecho, Funabashi-shi  
Chiba Prefecture, 273-0018, Japan

Phone : +81-47-420-3561 (Overseas dept.)

Fax : +81-47-420-3560

E-mail : export@seiko-sewing.co.jp

Printed in Japan 2019.02

<http://www.seiko-sewing.co.jp/>