

LCWN two needle series

High speed, Cylinder bed, Large vertical axis hook,
Compound feed and walking foot, Reverse stitch, Lockstitch machines




Variety

LCWN-28BL

Applications

- For sewing medium to heavy weight fabrics, leather, synthetics, canvas and various coated and laminated materials.
- Suitable for sewing tubular and curved work such as shoes boots, bags and handbags.

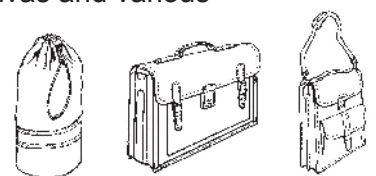

LCWN two needle series

Features

- Improved exposure of arm-feeding mechanism components which provides safety environment. (mechanical part of alternating presser foot, foot lifter mechanism(knee lifter) and presser foot spring)
- Semi-automatic lubrication system.
- Large vertical axis hook.
- Safety clutch prevents the hook from being damaged.
- Reverse stitching by stitch adjusting lever.
- Automatic presser foot lift (FL) available as option.

Specifications

Variety	LCWN-28BL	
Number of needle	two needle	
Max. sewing speed	2,000 s.p.m.	
Max. stitch length	1/4" (6.2 mm)	
Clearance under presser foot	by knee	5/8" (16 mm)
	by hand	21/64" (8.5 mm)
Needle bar stroke	1-25/64" (35.4 mm)	
Needle(standard)	DPx17 (#22) , 135x17 (#140)	
Thread	#8 (standard)	
Hook	Large vertical axis hook (2.0 times)	
Amount of lift of walking foot	1/8"-15/64" (3.2 - 6 mm) standard 1/8" (standard 3.2 mm)	
Thread take up lever	Slide type	
Lubrication	Semi-automatic lubrication type	
Cylinder size	3-7/64"(79 mm) dia.	
Working space	10-5/32"x 4-21/64" (258 x 110 mm)	
Motor	Clutch motor	
Net weight(Head only)	35 Kg	

NOTE: (1) Speed depends on threads, materials and type of operation
 (2) Specifications subject to change without notice



SEIKO SEWING MACHINE CO., LTD.

2-13-6, Sakaecho, Funabashi-shi
 Chiba Prefecture, 273-0018, Japan

Phone : +81-47-420-3561 (Overseas dept.)

Fax : +81-47-420-3560

E-mail : export@seiko-sewing.co.jp



Printed in Japan 2019.10

<http://www.seiko-sewing.co.jp/>