

CW series

Single needle, High speed, Cylinder bed, Vertical axis hook, Compound feed and walking foot, Reverse stitch, Lockstitch machine



CW-8B-2


Variety

CW-8B-2

Standard model

Applications

- Designed for stitching tubular and curved work.
- Suitable for sewing such products as caps, cushions, boots, shoes, bags, luggage, handbags, travelware accessories, etc.

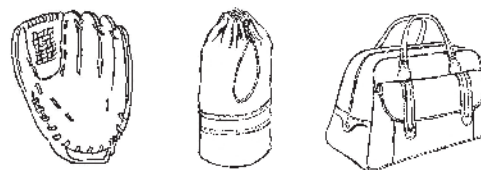

Features

- Vertical axis hook.
- Safety clutch prevents the hook from being damaged.
- Reverse stitching by stitch adjusting lever.
- Compound feed and walking foot mechanism assures even feeding of materials.
- Semi-automatic lubrication system and large hook machines are available. (**LCWN series**)

Specifications

Variety	CW-8B-2	
Number of needle	Single needle	
Max. sewing speed	2,500 s.p.m.	
Max.stitch length	13/64" (5 mm)	
Clearance under presser foot	by pedal	35/64" (14 mm)
	by hand	21/64" (8.5 mm)
Needle bar stroke	1-5/16" (33.2mm)	
Needle(standard)	DPx17 (#22) , 135x17 (#140)	
Thread	#8 (standard)	
Hook	Vertical axis hook	
Amount of lift of walking foot	7/64"-7/32" standard 1/8" (2.7 - 5.5 mm) (standard 3.2 mm)	
Thread take up lever	Slide type	
Lubrication	Hand type	
Bobbin size	Φ 55/64" (Φ 22 mm), t=13/32"(10.3mm)	
Cylinder size	2-9/16"(65 mm) dia.	
Working space	10-5/32"x 4-21/64" (258 x 110 mm)	
Net weight(Head only)	32Kg	

NOTE: (1) Speed depends on threads, materials and type of operation
(2) Specifications subject to change without notice



SEIKO SEWING MACHINE CO., LTD.

2-13-6, Sakaecho, Funabashi-shi
Chiba Prefecture, 273-0018, Japan
Phone : +81-47-420-3561 (Overseas dept.)
Fax : +81-47-420-3560
E-mail : exsales@seiko-sewing.co.jp

Printed in Japan 2024. 7

<https://www.seiko-sewing.co.jp/en/>